

Carriage Creek

doorLink
Manufacturing, Inc.®

3 LAYER
SANDWICH CONSTRUCTION

CARRIAGE HOUSE DOORS



DESERT TAN

Carriage Creek

COLLECTION

PAINT	EFFICIENCY
1.0 MIL	10.25 R-VALUE
INTERIOR	
STEEL SKIN	

All the elegance of a Carriage House door, with the strength and protection of a steel door.

Configure your door on our website at

www.DoorLinkMfg.com

Carriage Creek COLLECTION



CARE INSTRUCTIONS

Carriage Creek Garage Doors are hand-crafted with low maintenance in mind with their steel and composite construction. In order to keep them in excellent condition, we offer these care instructions.

CLEANING

Clean regularly with warm, soapy water only. Do not use an abrasive cleanser.

PAINTING

Use high quality, 100% acrylic latex paint. Use paint with an LRV (Light Reflective Value) greater than 15%. This will exclude some darker colors from being used. The Carriage Creek Warranty will be void if paint with an LRV of 15% or less is used.

MAINTENANCE

Although you should conduct monthly safety checks and provide regular limited maintenance, an annual visit from a trained door technician can keep your door operating safely and smoothly for a long time.



ALMOND



SANDSTONE




WHITE




doorLink
Manufacturing, Inc.®


STYLE 1




STYLE 1 ARCH




STYLE 2




STYLE 2 ARCH




STYLE 3




STYLE 4




STYLE 5




STYLE 6




STYLE 7



STYLE 8



AVAILABLE WINDOWS

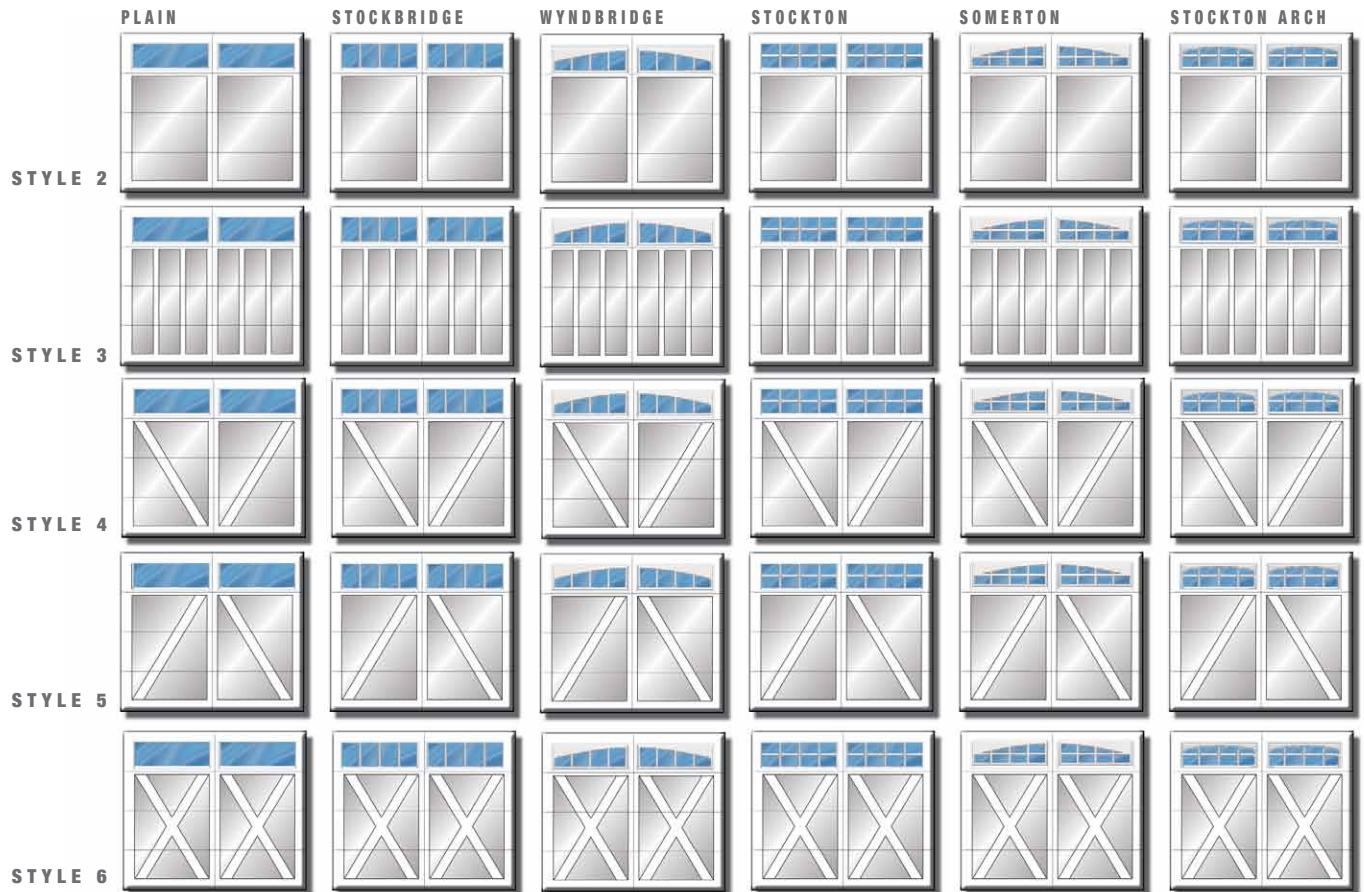

ALL SINGLE CAR GARAGE DOOR STYLES ARE ALSO AVAILABLE IN A DOUBLE CAR STYLE.

Carriage Creek

**3 LAYER
SANDWICH CONSTRUCTION**

CARRIAGE HOUSE DOORS

STANDARD FEATURES

2" THICK WITH COMPOSITE OVERLAY

Steel panel sandwich constructed of top quality materials. Overlay chemically bonded to steel sections to give the look of a carriage style door.

1.0 MIL PAINT SYSTEM

Includes .25 mil rust inhibiting primer and .75 mil exterior top coat that resists fading and chalking while providing consistent color from panel to panel, and long life.

20 GAUGE HOT DIPPED STEEL HINGE PLATES

Galvanized steel hinge plates run the full height of each section at all hinge locations to facilitate the attachment of hinges, handles, struts and step plates.

TONGUE AND GROOVE MEETING RAILS

For superior strength and better sealing against wind, rain and snow.

RIGID ALUMINUM RETAINER

Provides added strength while securing replaceable u-shaped bottom weatherstrip to help keep the elements out.

R VALUE 10.25 INSULATION

Sandwich type construction with polystyrene insulation pressure bonded between two sheets of hot dipped galvanized steel enhances your home's energy savings, makes your door operation quieter, and reduces exterior noise in your garage.

CFC FREE EXPANDED POLYSTYRENE

Environmentally friendly insulation that will not degrade with vibration or time.

OPTIONAL DECORATIVE HARDWARE

CAST IRON




STAMPED STEEL



SIZES AVAILABLE


DOOR WIDTHS:

8', 9', 10'



DOOR WIDTHS:

12', 14'



DOOR WIDTHS:

15', 16', 18'

HEIGHTS AVAILABLE:

6'6" 6'9" 7'0" 7'6" 7'9" 8'0"



COLORS



WHITE



SANDSTONE



ALMOND


BROCHURE COLOR MAY VARY FROM ACTUAL PRODUCT.




DESERT TAN

* ALL OVERLAY BOARDS ARE FINISHED IN WHITE PRIMER ONLY.

CONSTRUCTION



PAINT LAYERS

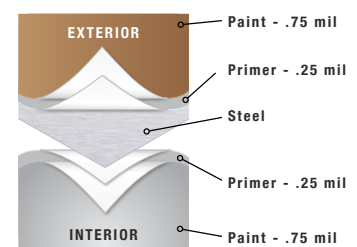

Your Local Authorized Dealer:



Phoenix Garage Doors
905 836 0727, 416 241 9265
sales@phoenixgaragedoors.ca

To view this product online:

